



In
Light
We
Trust

NEW PRODUCTS RELEASE 2020

esse-ci
LIVING LIGHT

WE DESIGN OUR PRODUCTS
WITH PASSION, TECHNICAL
EXPERTISE AND ATTENTION
TO DETAIL, THINKING ABOUT
THE PEOPLE WHO LIVE
OUR LIGHT EVERYDAY.

ESSE-CI LIVING LIGHT



LIGHT
FOR
OFFICE

WAVE

OFFICE

esse-ci




PURITY OF THE SHAPE

- W** 28 -> 94
-  >112 lm/W
-  CRI >90
-  IP 40
-  UGR <16
-  Direct/Indirect Emission




esse-ci
LIVING LIGHT

WAVE

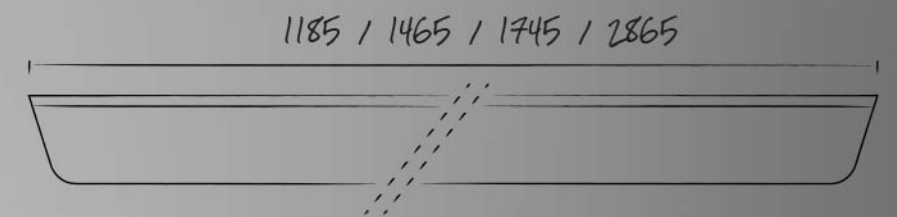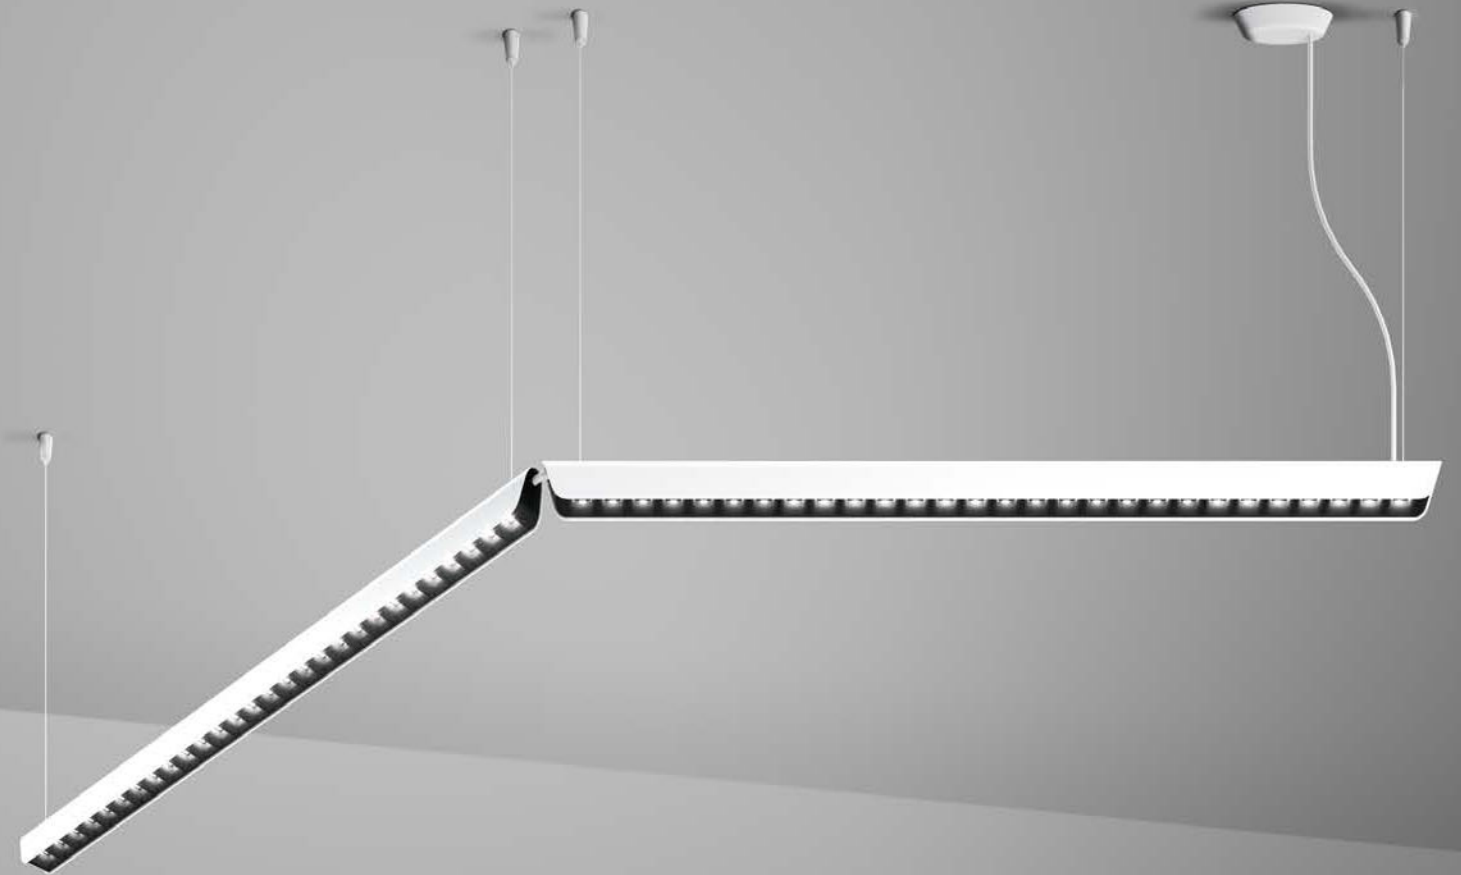


WAVE

OFFICE

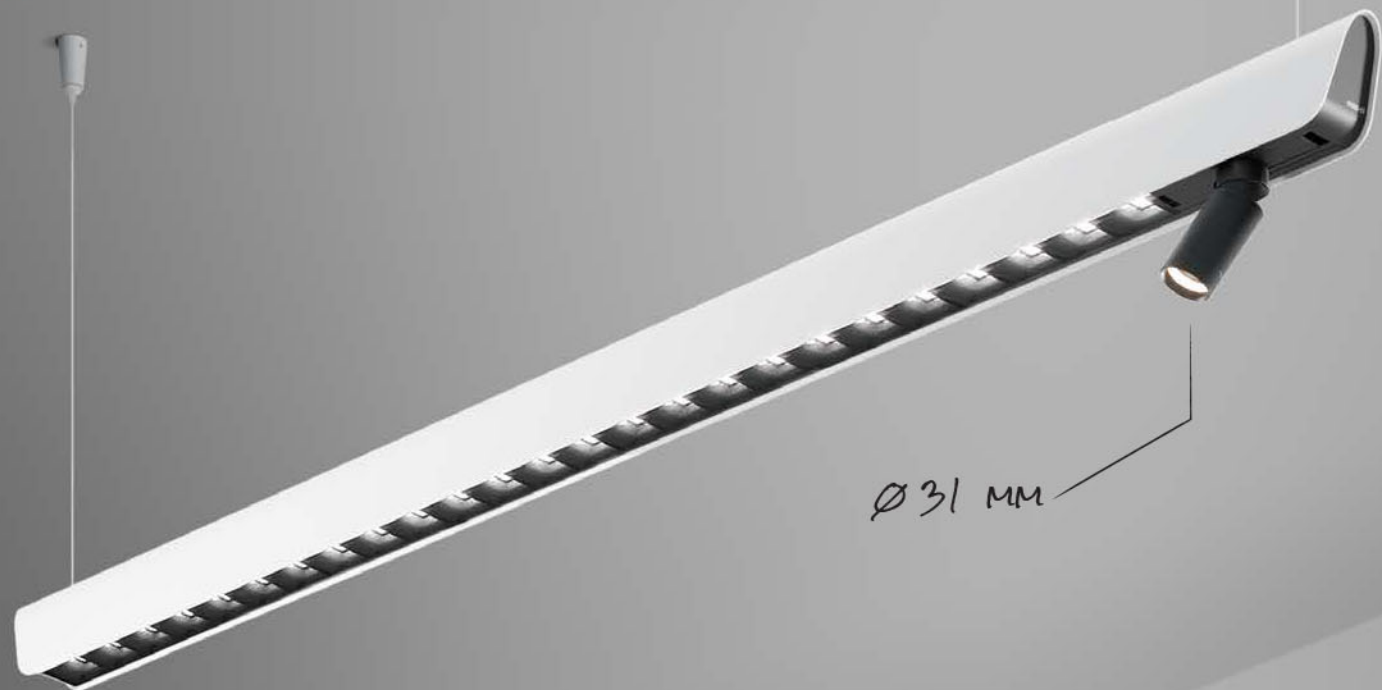



Ø 31 mm

INDIRECT
LIGHT

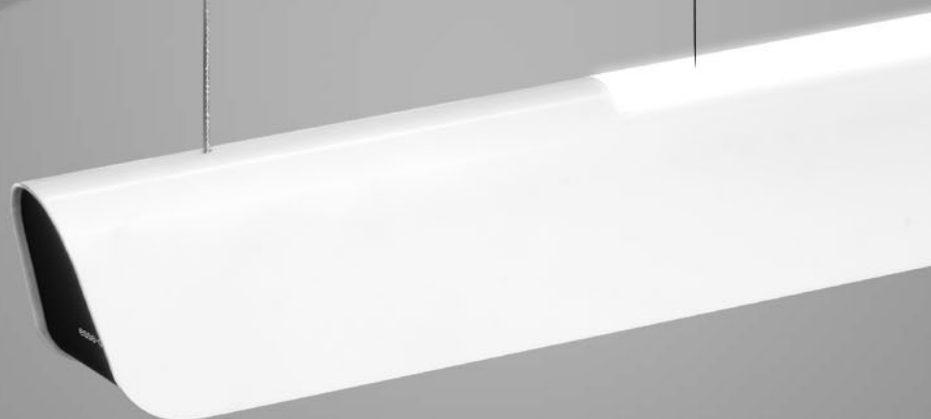

esse-ci
LIVING LIGHT


WAVE recessed

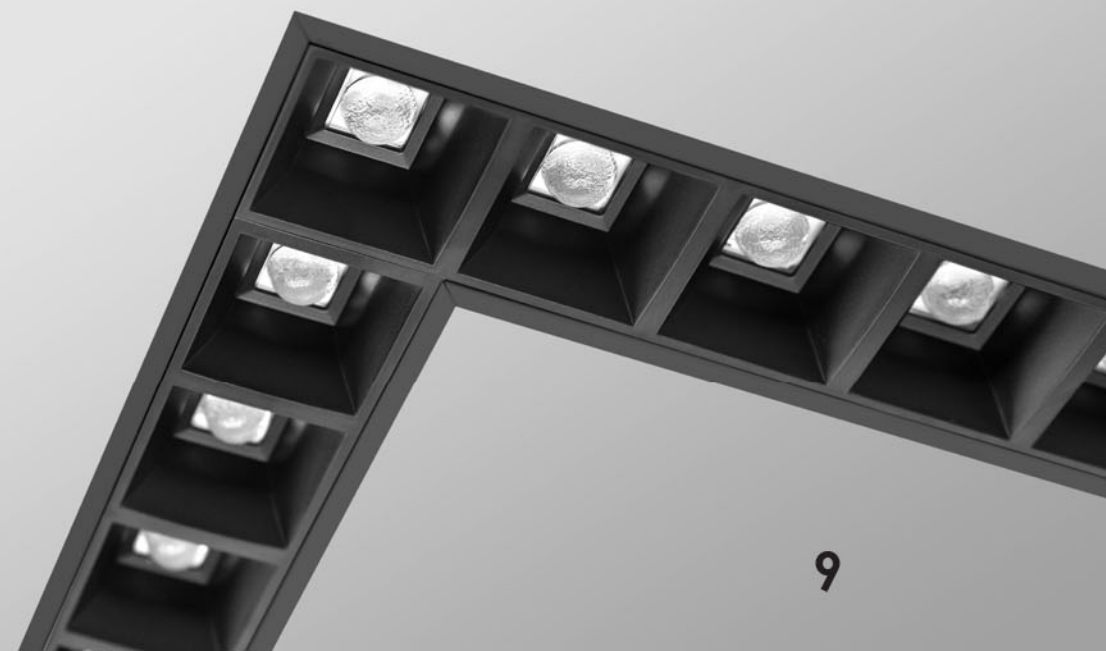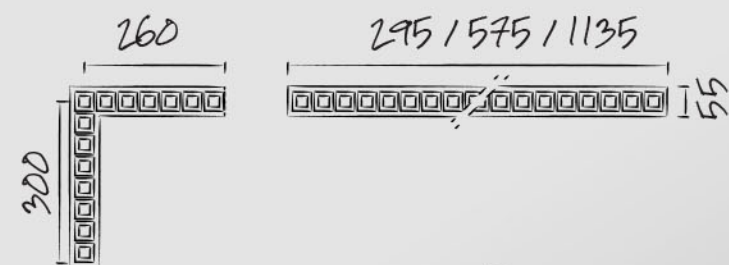

ENDLESS VERSATILITY



-  3 -> ∞
-  up to 150 lm/W
-  CRI > 90
-  IP 40
-  UGR < 16; UGR < 22
-  Direct/Indirect Emission


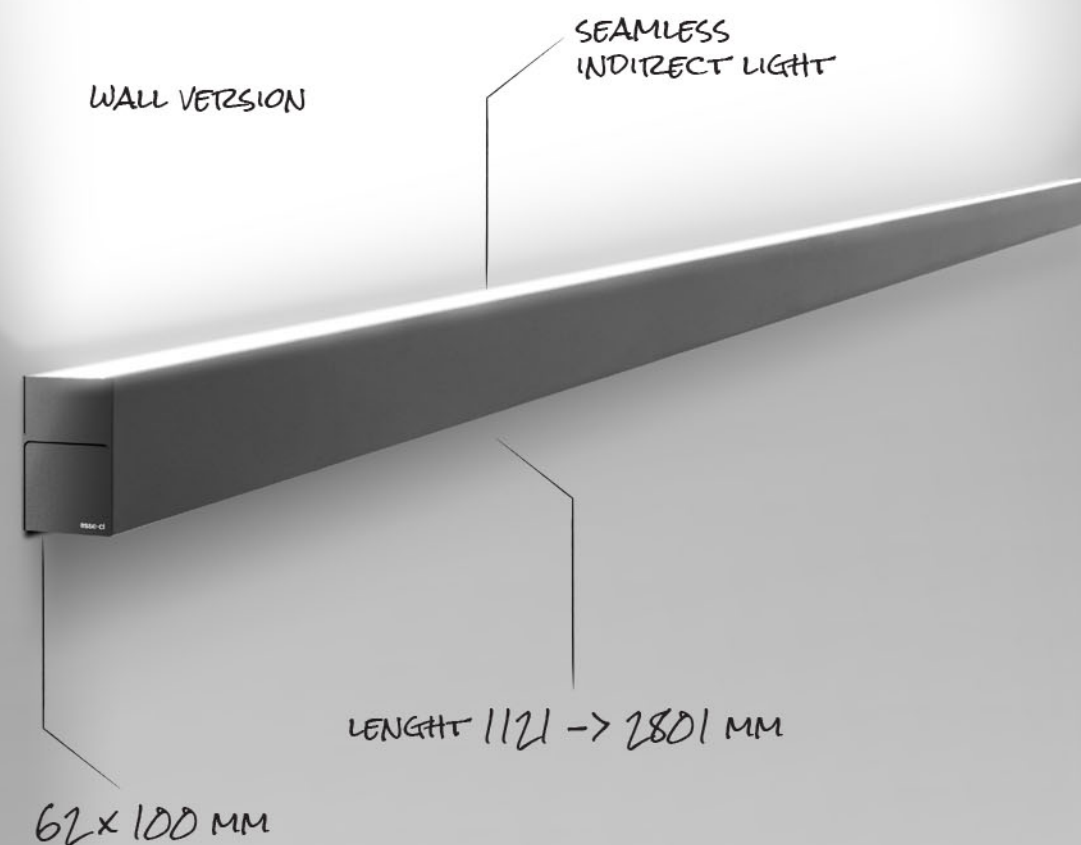




CLD (COLLIMATED DIFFUSER)
UGR < 16

ASYMMETRICAL

OPTICAL
FROSTED
PMMA

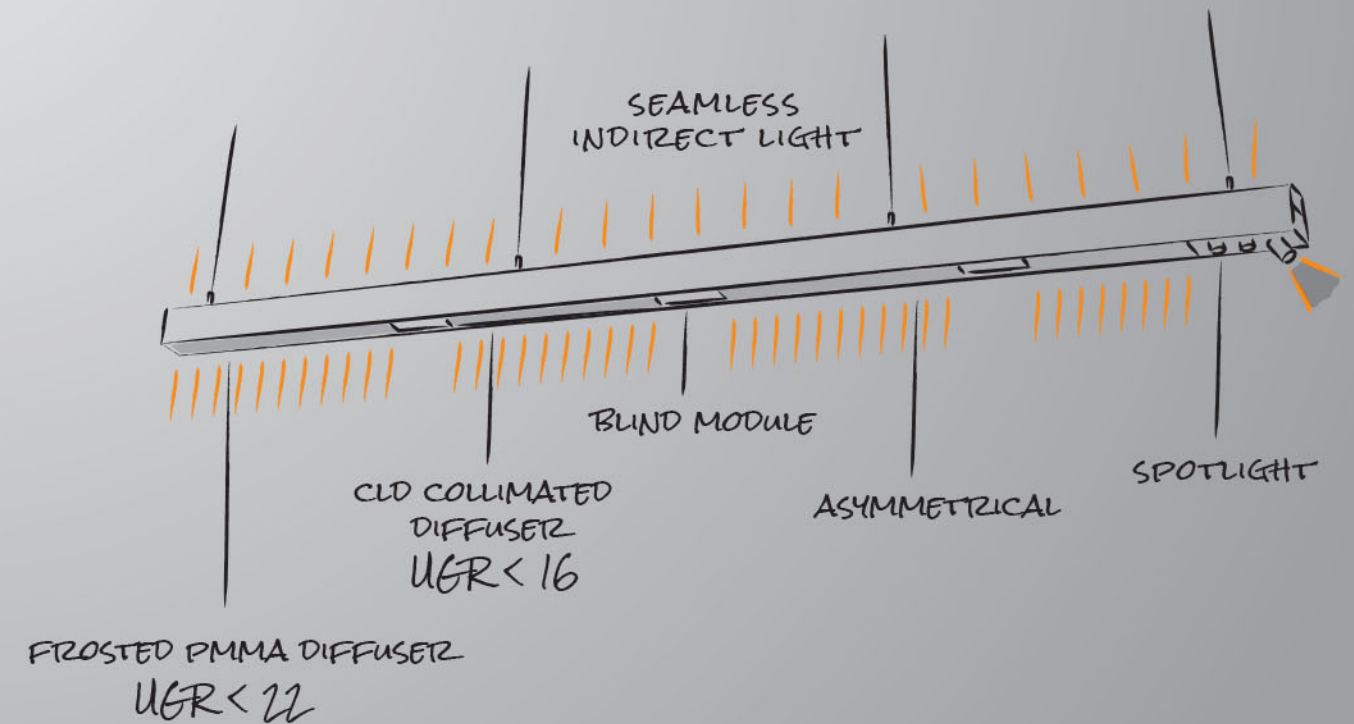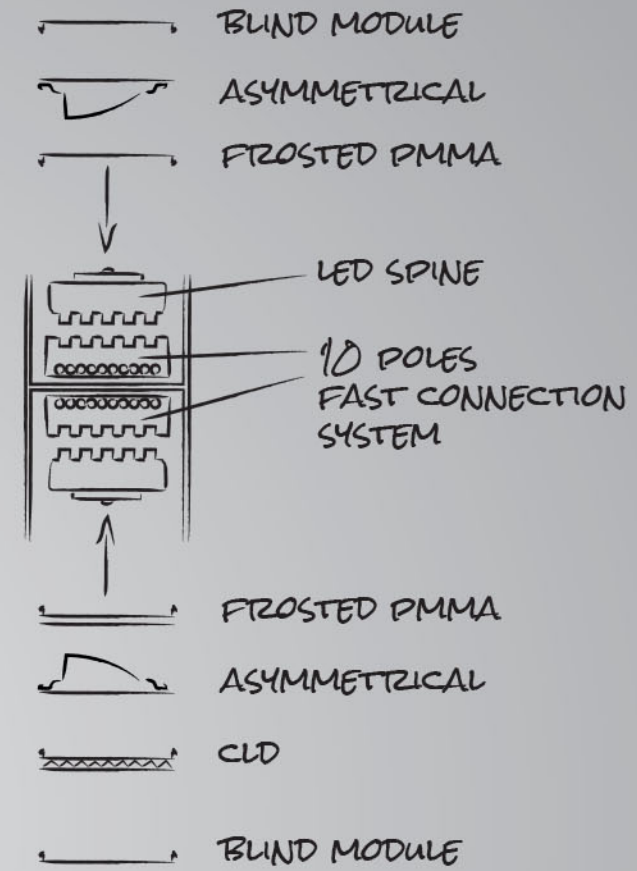

FLIP

OFFICE

FREE FUNCTIONALITY




- W** 10
-  >125 lm/W
-  CRI >90
-  IP 40
-  UGR <16
-  Direct Emission

14

esse-ci
LIVING LIGHT

599 mm


FLIP

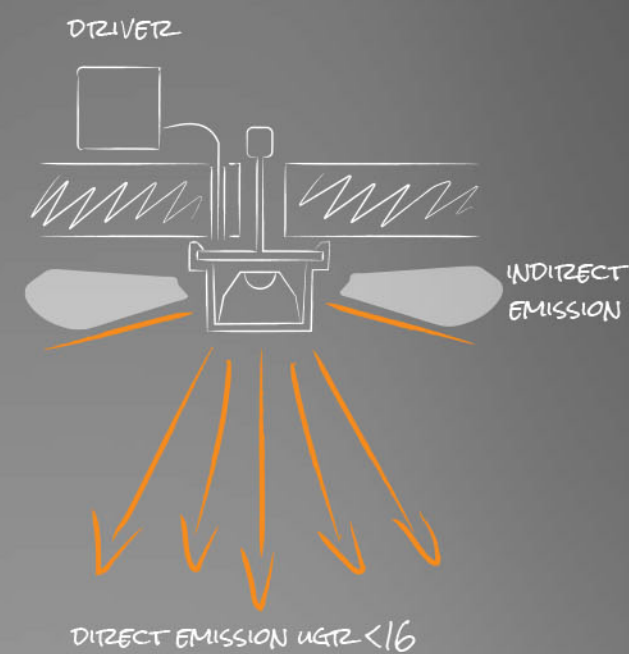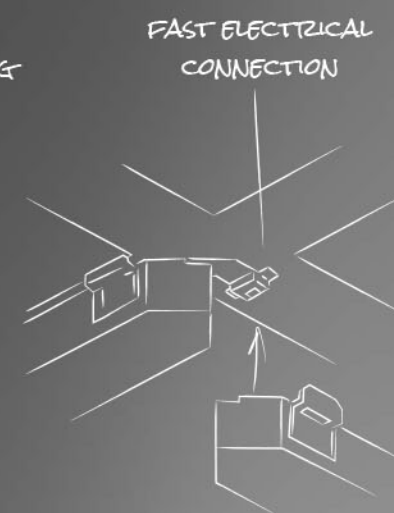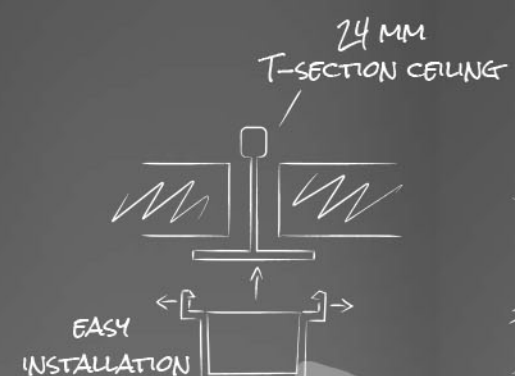

15

A SKY OF LIGHT

- W** 18->60
- >125 lm/W
- CRI >90
- IP 40
- UGR <19
- Direct Emission

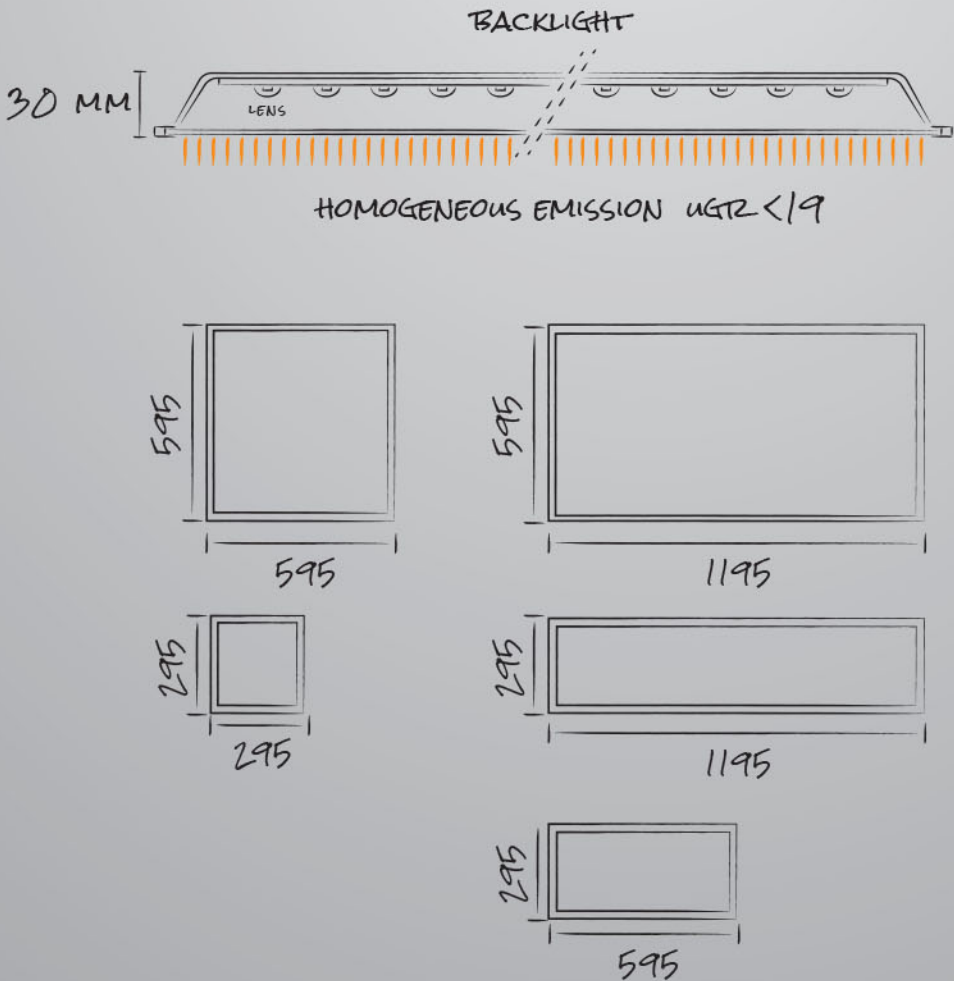

PIPE LINE


OFFICE



AUTHENTIC
ELEGANCE


- W** 46 -> 62
- >115 lm/W; >132 lm/W
- CRI >90
- IP 40
- UGR <19; <22
- Direct/Indirect Emission


esse-ci
LIVING LIGHT

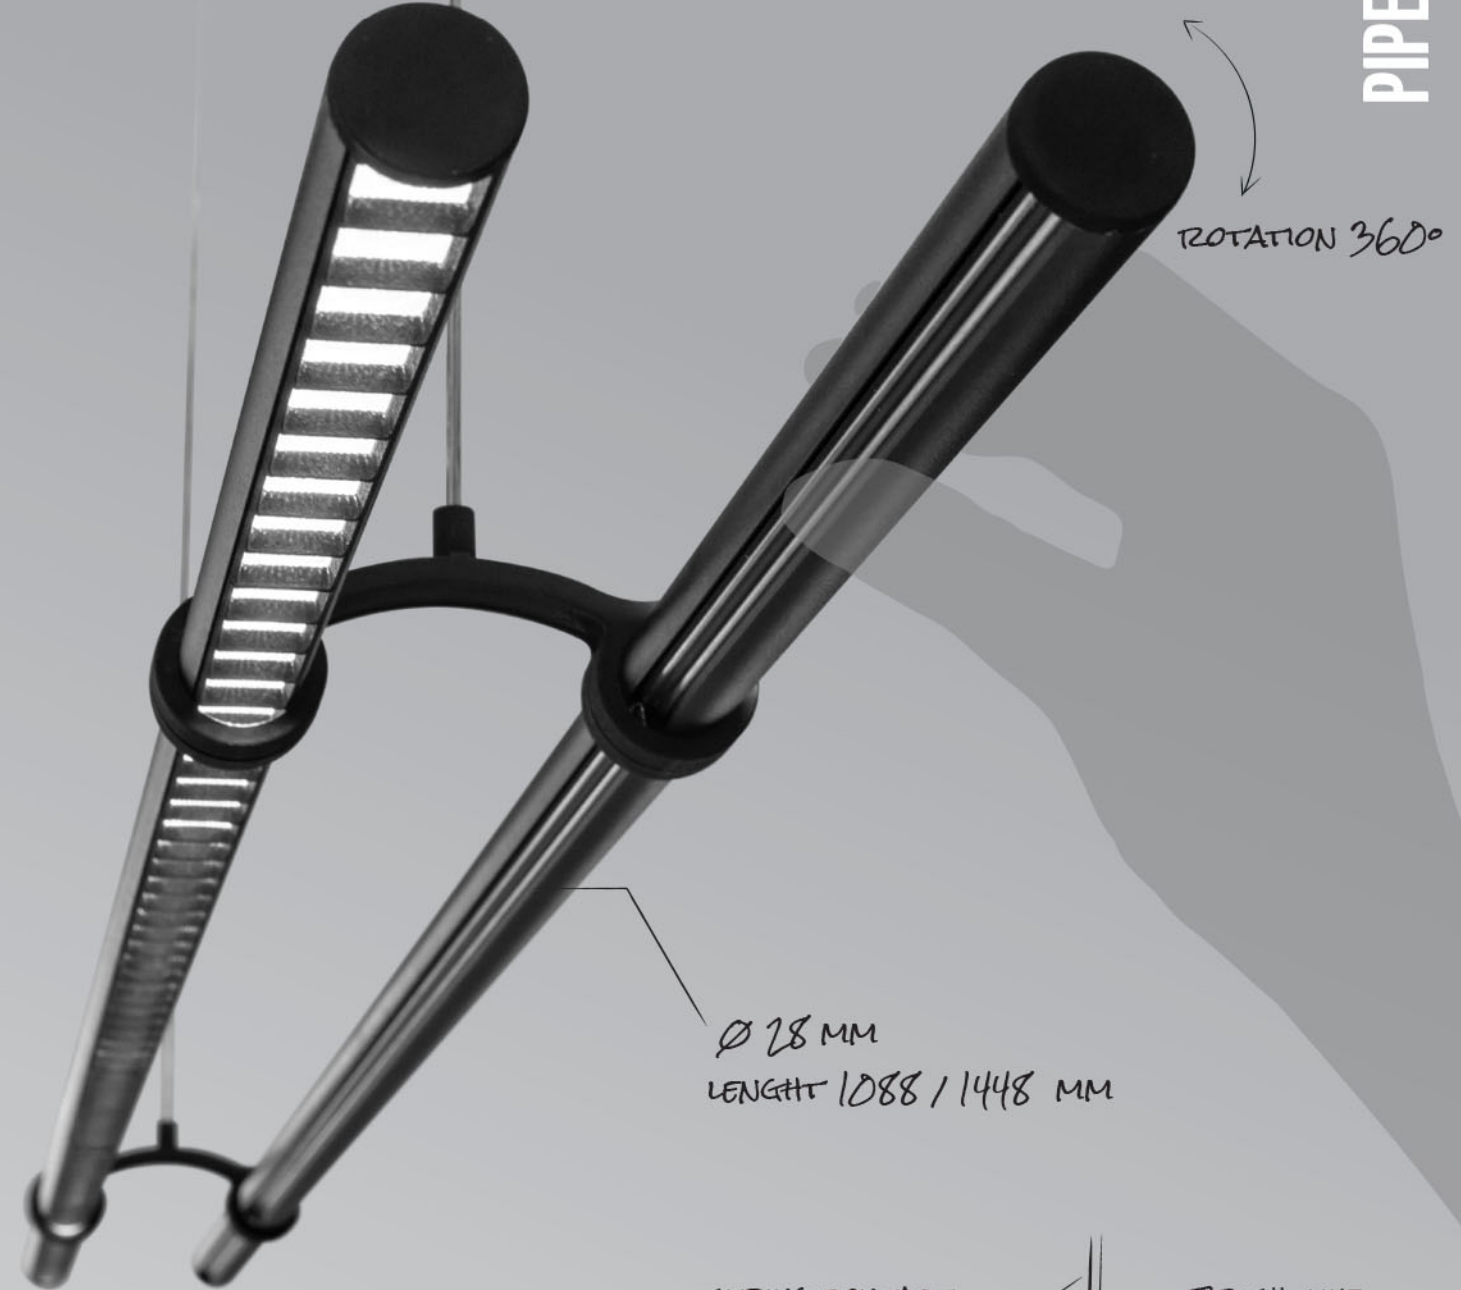

PIPE LINE

ROTATION 360°

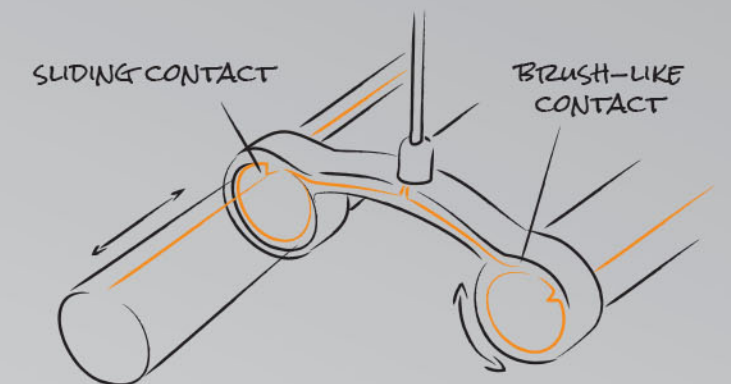

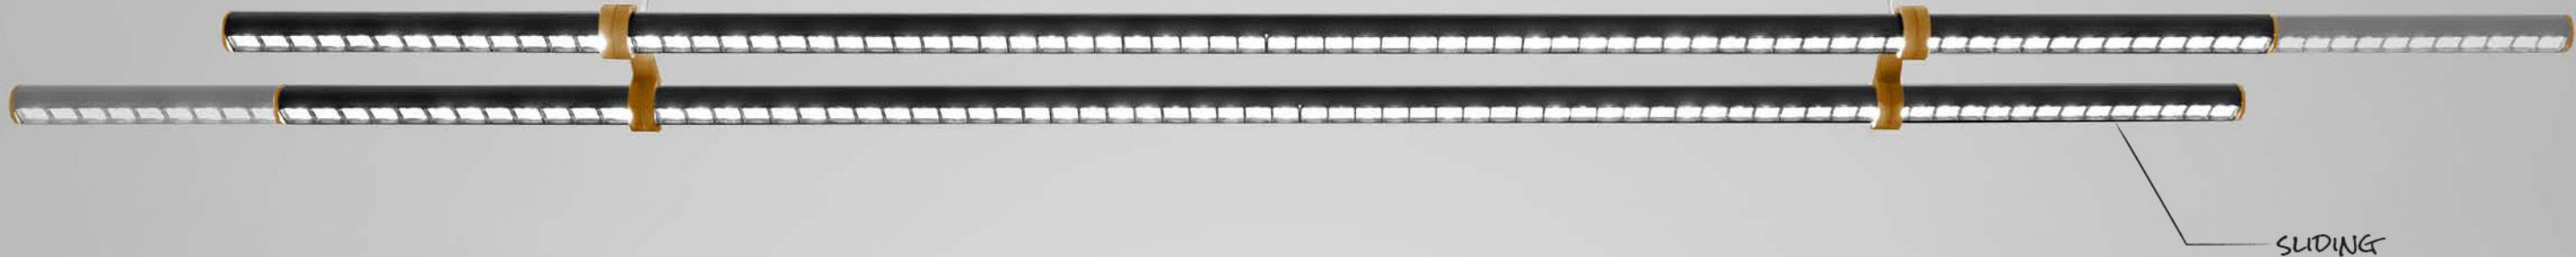

AVAILABLE OPTICS:

SOFT DIFFUSION
UGR < 22

UGR < 22

COMBINED
DIFFUSION

UGR < 19

LOW GLARE
DIFFUSION
UGR < 19

ONE RING

OFFICE

A TRIBUTE TO ESSENTIALITY

- W** 105 -> 370
-  >97 lm/W
-  CRI>90
-  IP 40
-  UGR <22 ; <19
-  Direct/Indirect Emission

esse-ci
LIVING LIGHT


ONE RING

ONE RING

OFFICE

DIAMETERS:


1140 MM
1510 MM
1860 MM
2240 MM
2580 MM
2960 MM



24

esse-ci
LIVING LIGHT

ONE RING

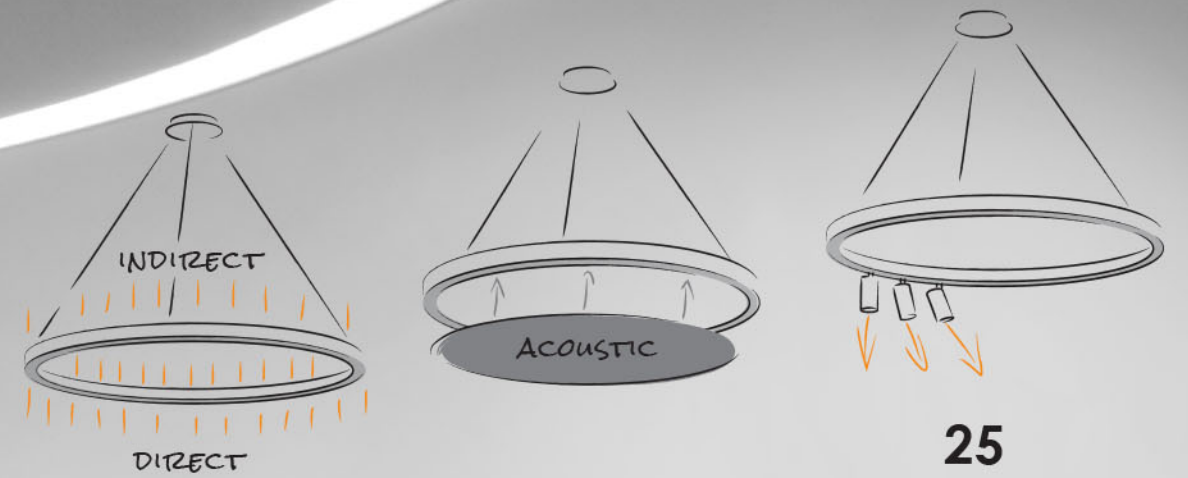

25

JOOOLS

OFFICE




FORMAL
PERFECTION



-  19; 22; 27
-  >99 lm/W
-  CRI > 90
-  IP 40
-  UGR < 19
-  Direct / Indirect Emission

esse-ci
LIVING LIGHT

JOOOLS

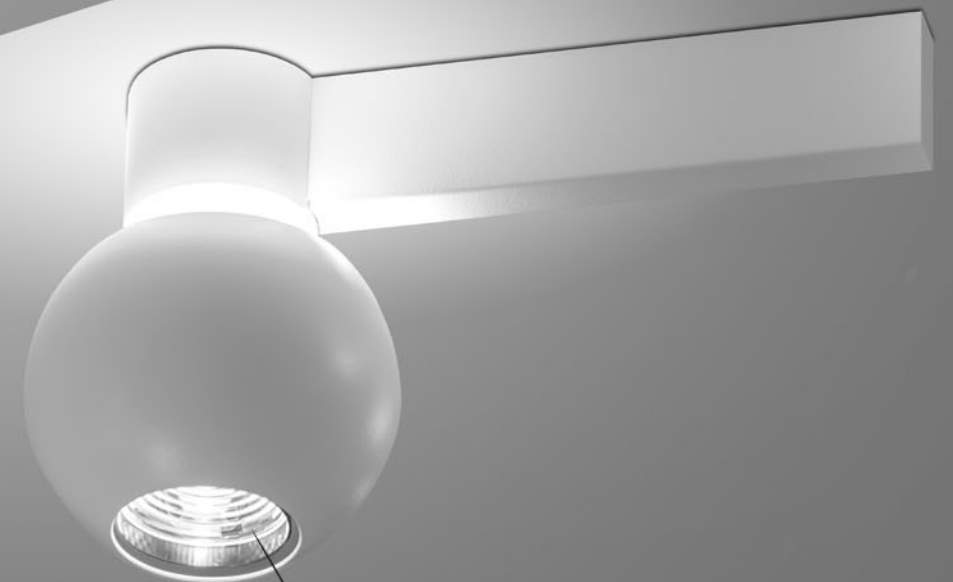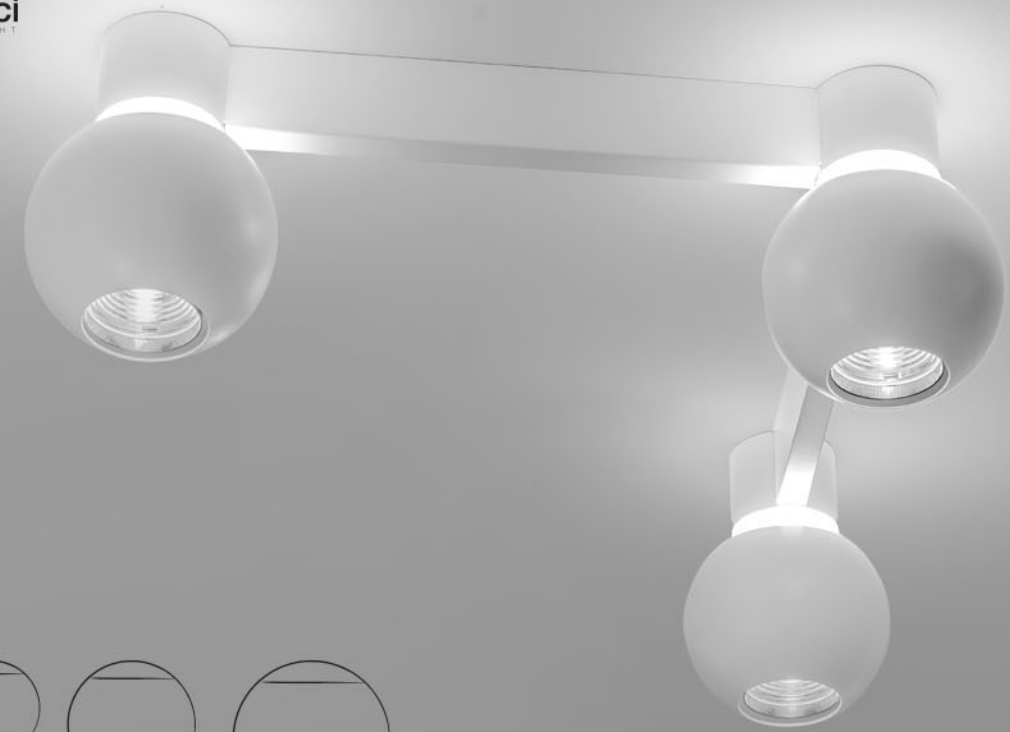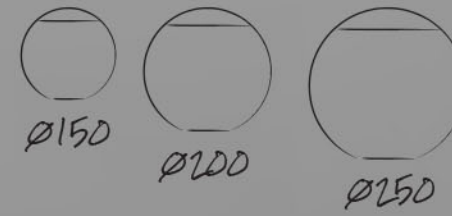

14° / 35° / 50°

JOOOLS

OFFICE

ROTATION: 180°

TILTING: 180°

esse-ci
LIVING LIGHT

JOOOL

48V TRACK

RECESSED /
CEILING SUSPENDED /
FRAMELESS

JOOOLS
LW



LIGHT
FOR
RETAIL

A LIGHT SMOOTH AS SILK



- W** 18 -> 33
- >105 lm/W
- CRI > 90
- IP 40
- Direct Emission
- UGR <22




Ø 80 / 110 mm
LENGTH 143 / 170 mm

TERES^{iz}

RETAIL

ZOOM WITH A TOUCH

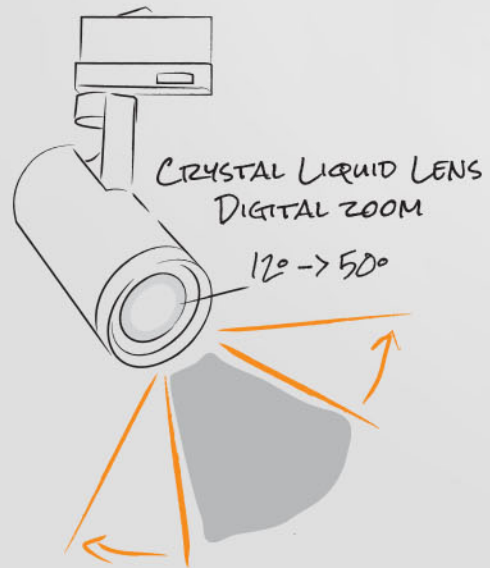

Ø 80 / 110 mm

- W** 13 -> 25
- >95 lm/W
- CRI >90
- IP 40
- Direct Emission
- UGR <22




esse-ci
LIVING LIGHT

NO TRACK, JUST AN EDGE



TERES^{cove}

- W** 36 -> 50
- >105 lm/W
- CRI > 90
- IP 40
- Direct Emission
- UGR <22

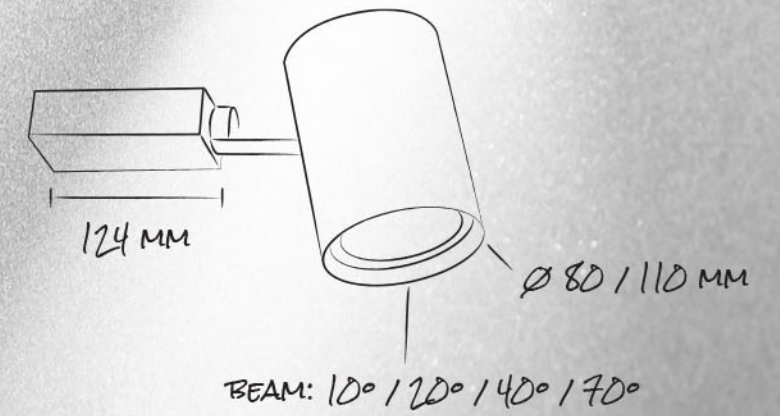




LOW
VOLTAGE

SMALL SIZE GREAT PERFORMANCE

- W** 3->7
-  >80 lm/W
-  CRI > 90
-  IP 40
-  UGR <19
-  Direct Emission

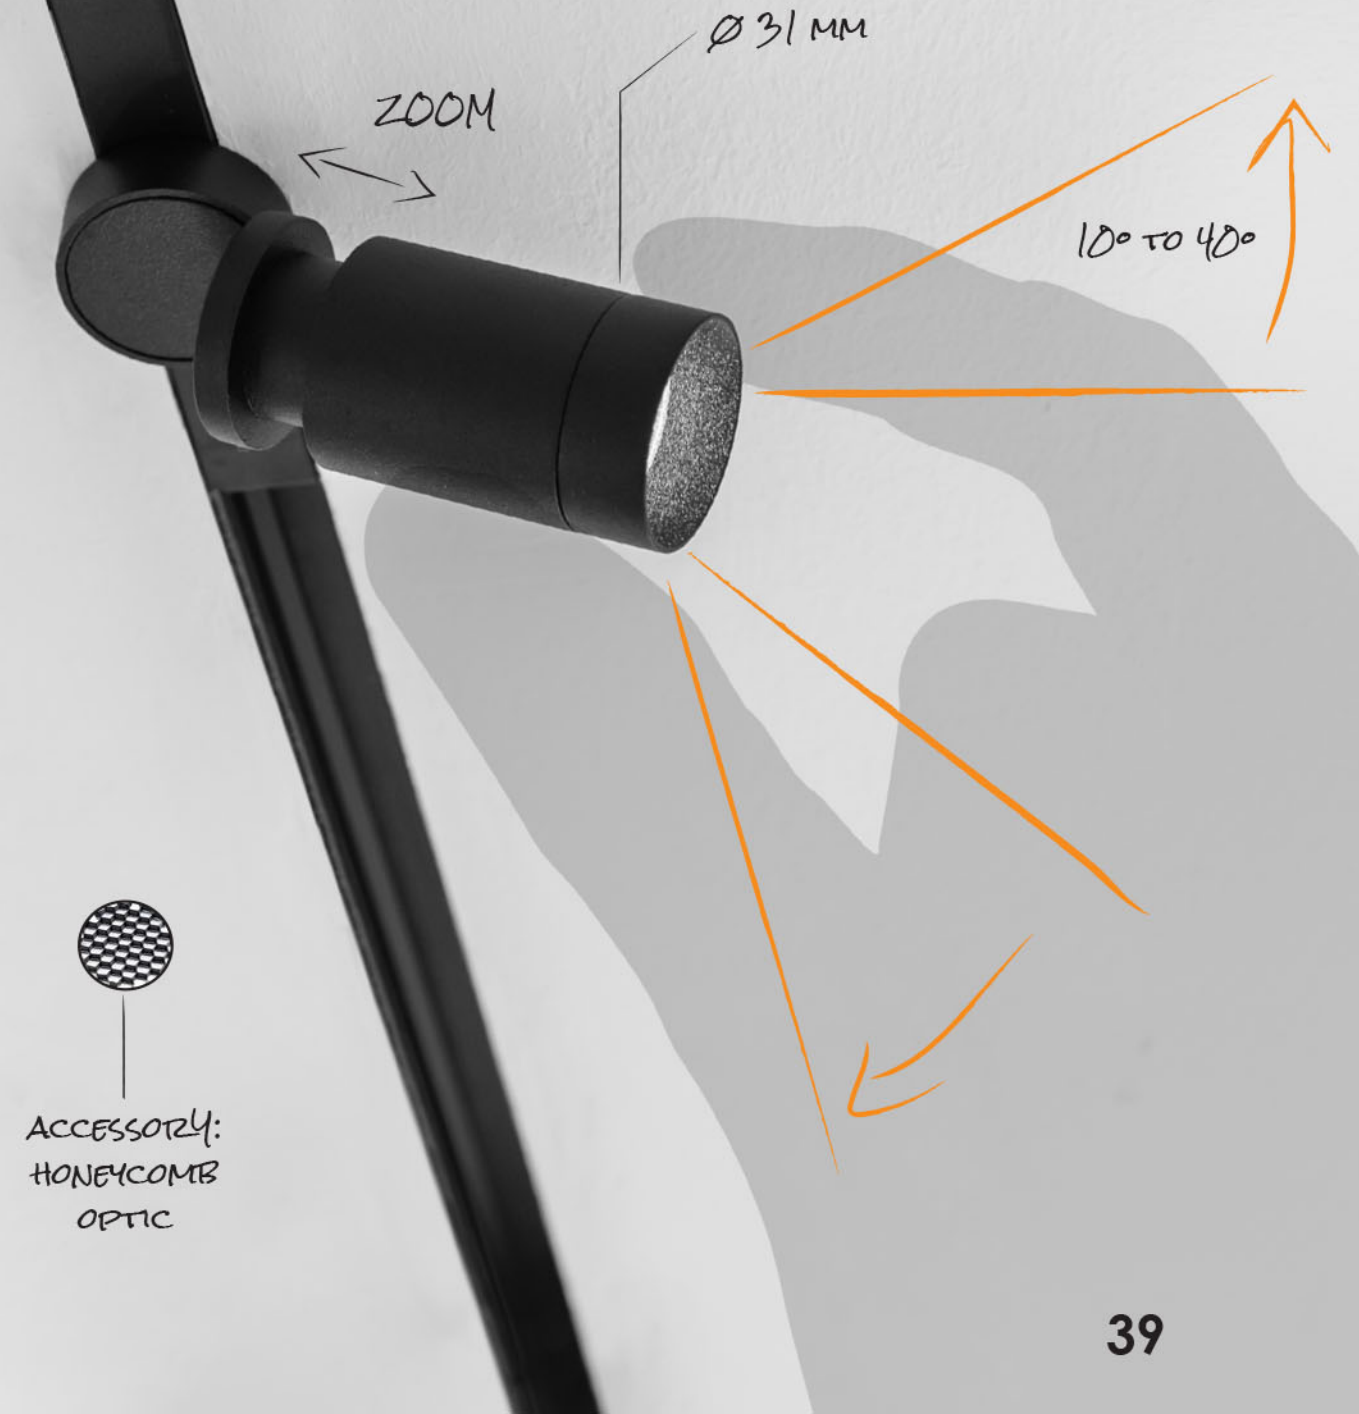


LUDO LINEAR high contrast

LOW VOLTAGE

AS EASY
AS SMART

- W** 12
- >96 lm/W
- CRI >90
- IP 40
- UGR <19
- Direct Emission

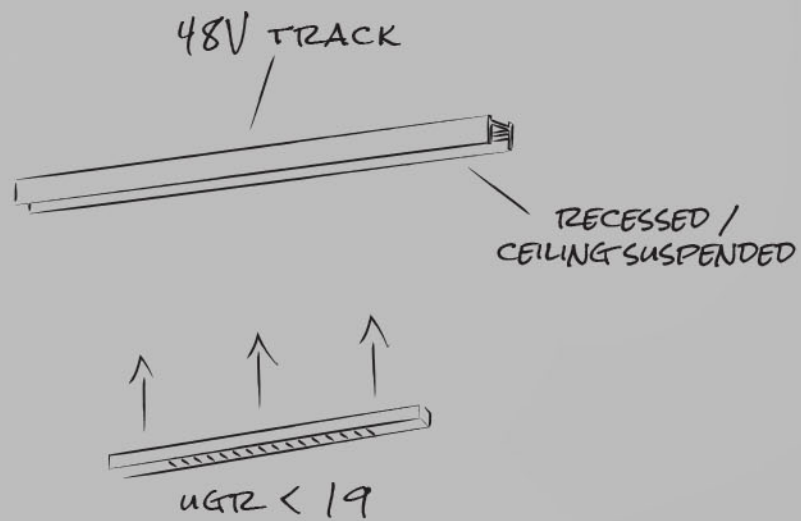


40

esse-ci
LIVING LIGHT

STYLO


- W** 10 -> 12
- > 88 lm/W; >100 lm/W
- CRI >90
- IP 40
- UGR <19; <22
- Direct Emission

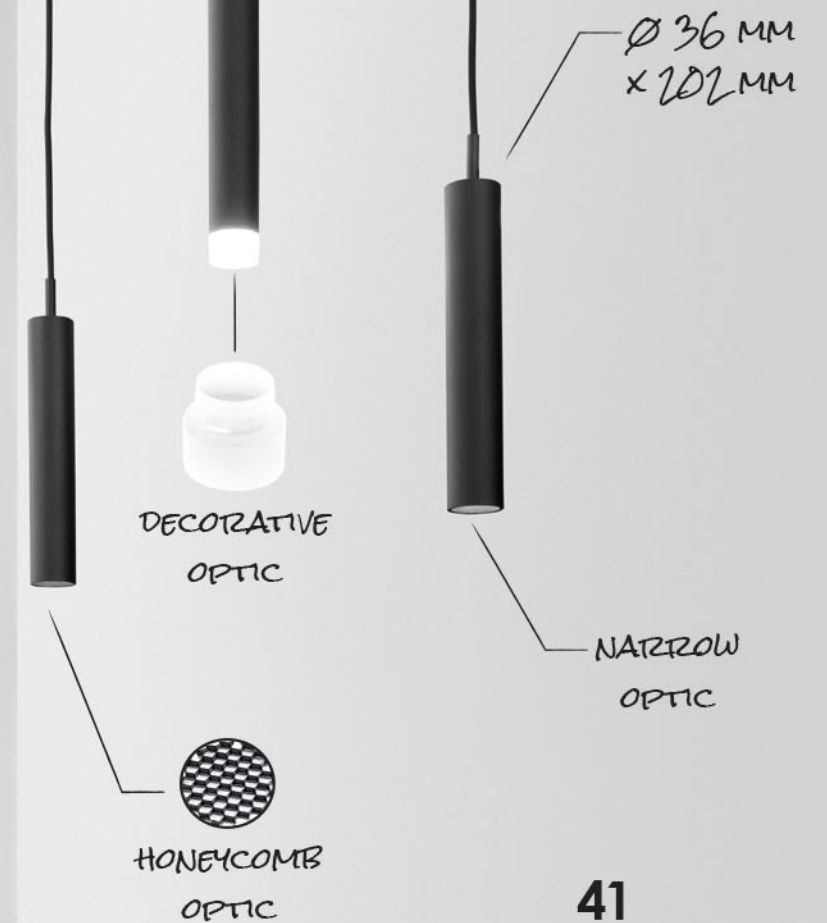

41




INDUSTRIAL

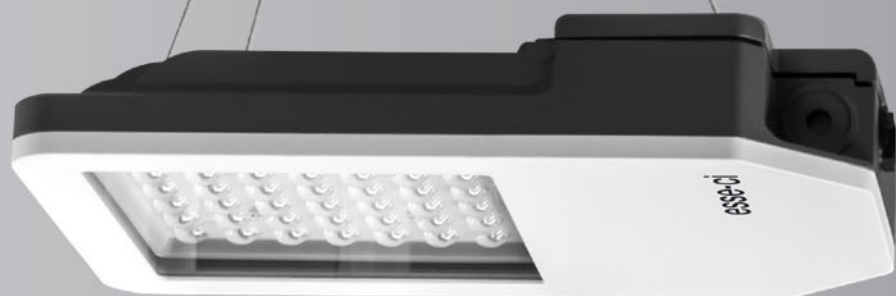


HIGHBAY


- W** 100 / 300
- >125 lm/W
- CRI >80
- IP 66
- IK 08
- 10 kW

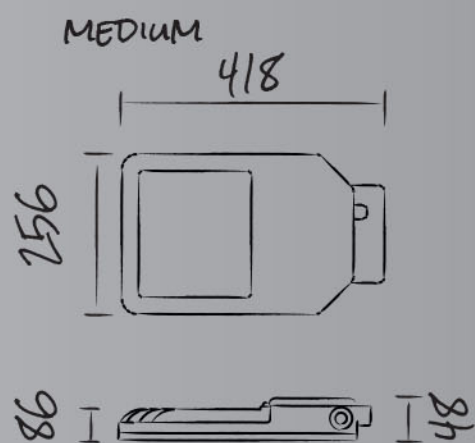

DIFFUSING



NARROW

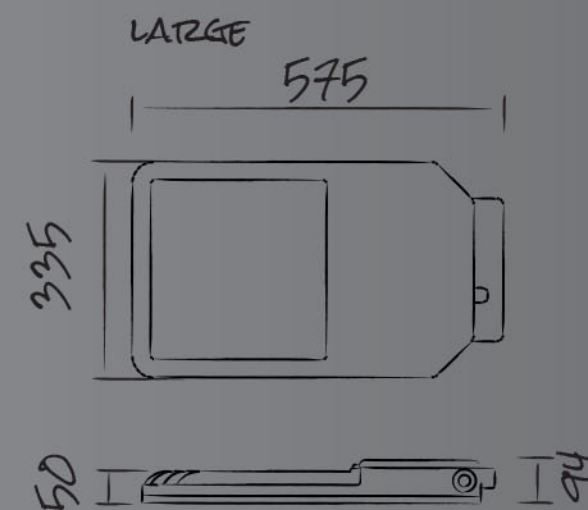




OUTDOOR
LIGHT

HALL LED IP 65 accent light

OUTDOOR

esse-ci
LIVING LIGHT

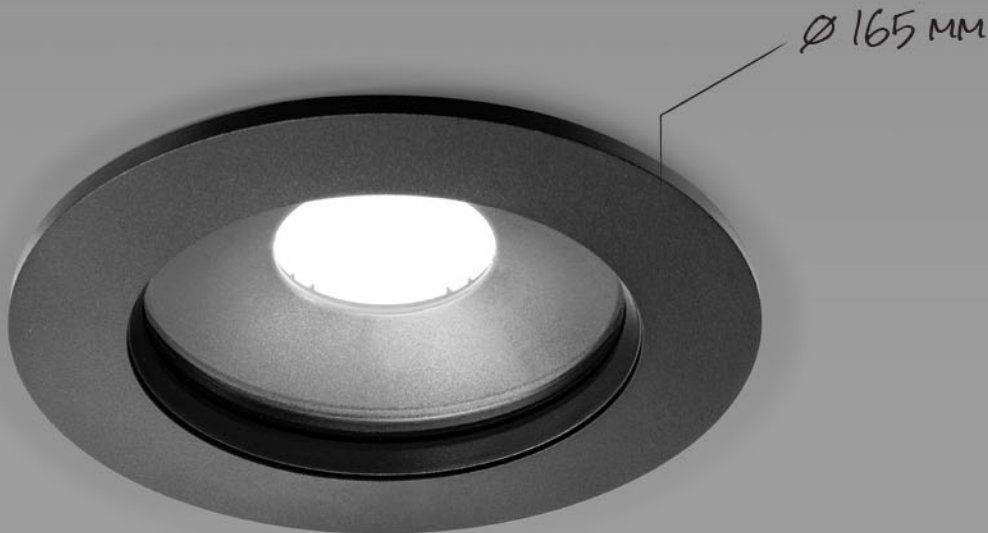


BEAM: 25°- 45°- 60°- 80°
CUT OFF > 30°



CUT OFF > 30°

HALL LED IP 65 wallwasher

- W** 13
- >105 lm/W
- CRI >90
- IP 65
- IK 10

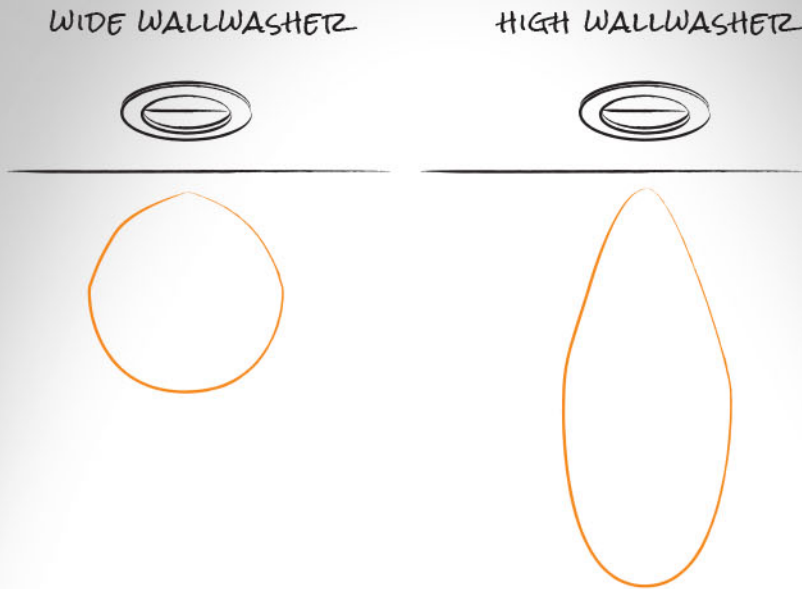

HALL LED^{ground}


OUTDOOR



Ø 175 mm

- W** 3/13
- >63 lm/W; >115 lm/W
- CRI >80
- IP 67
- IK 10
- 20 KN
- 20°C +40°C

HALL GROUND
MEDIUM AL



HALL GROUND
MEDIUM HA



HALL GROUND
MEDIUM WA



esse-ci
LIVING LIGHT

STAINLESS STEEL
FRAME




Ø 68 mm


HALL GROUND
MINI HR




HALL GROUND
MINI 1X



HALL GROUND
MINI 2X



HALL GROUND
MINI 4X



HALL LED^{ground}

TERES IP66

OUTDOOR




-  18/31
-  >108 lm/W; >120 lm/W
-  CRI >80
-  IP 66
-  IK 06
-  BUILT-IN DRIVER
-  -20°C +40°C

esse-ci
LIVING LIGHT




TERES IP66



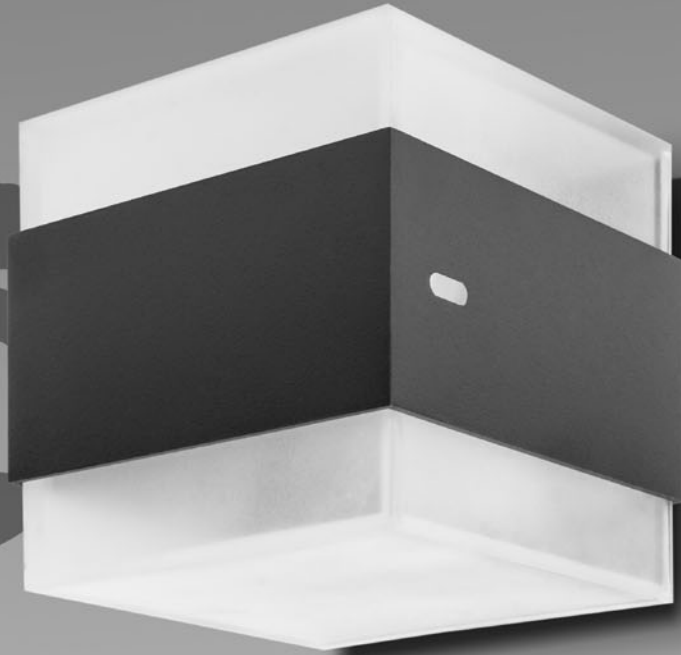


THE LIGHT CUBE

- W** 9 / 12
- >90 lm/W
- CRI >80
- IP 66
- IK 06
- BUILT-IN DRIVER
- 20°C +40°C

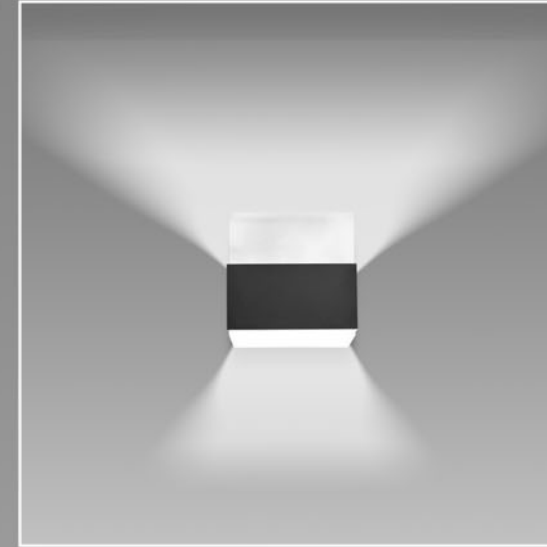

ADJUSTABLE
LAMP SHADE

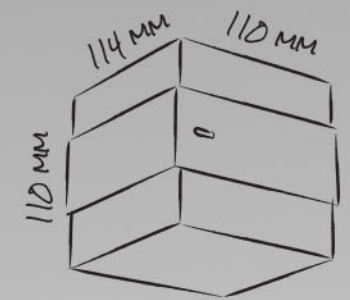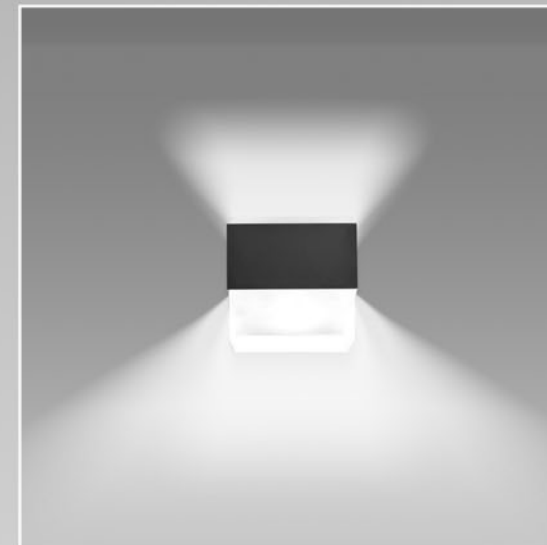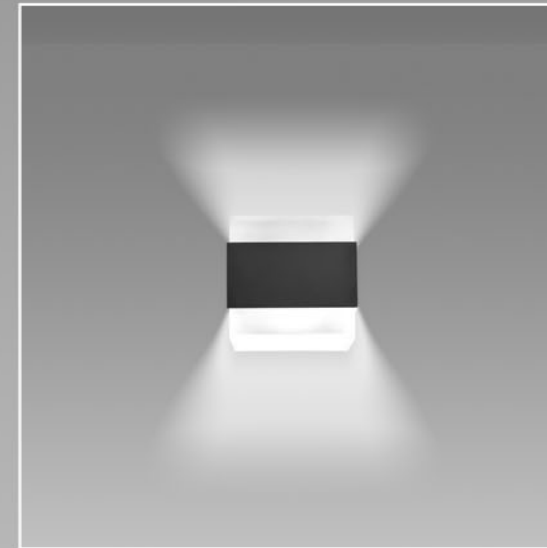

MINI



NOBIS



NOBIS MINI



SEMI-RECESSED
INSTALLATION

NOBIS USB
PORTABLE





USB CHARGE 

TOUCH:
- ON/OFF
- 3000 <-> 4000 K

NOBIS ground

OUTDOOR

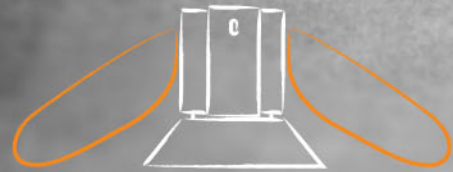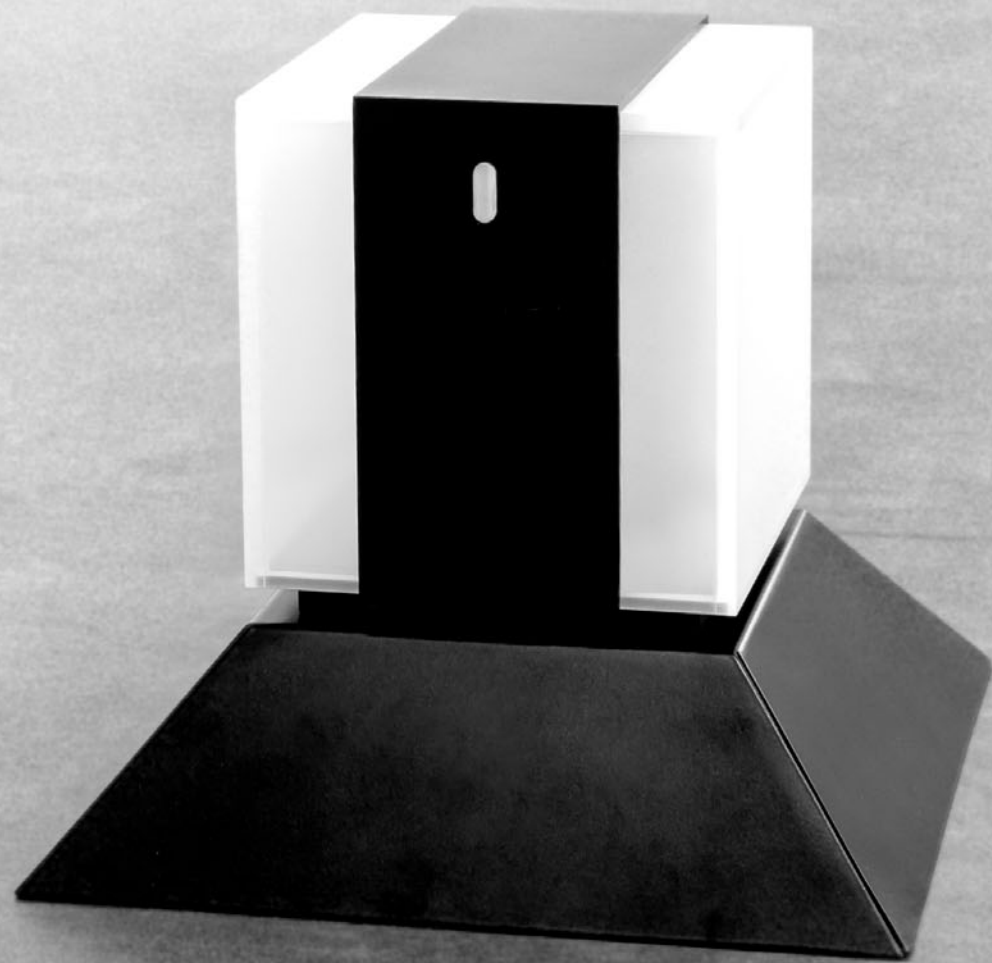


58

esse-ci
LIVING LIGHT

NOBIS bollard

H 700 mm


110 x 114 mm

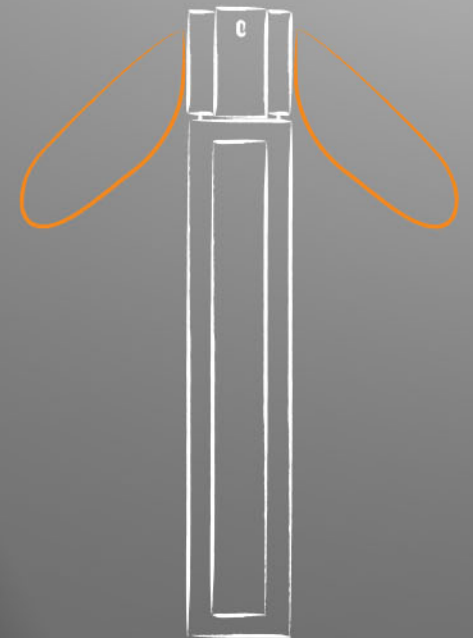

59

SCOUT

OUTDOOR

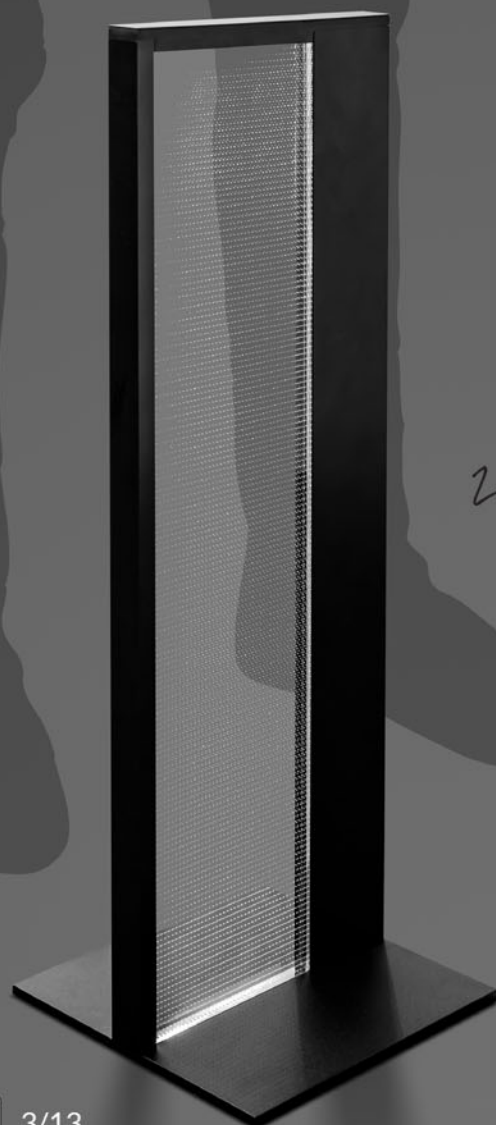

210 x 610 mm




25 mm

- W** 3/13
- >100 lm/W
- CRI >80
- IP 66
- IK 08
- BUILT-IN DRIVER
- 20°C +40°C

60

esse-ci


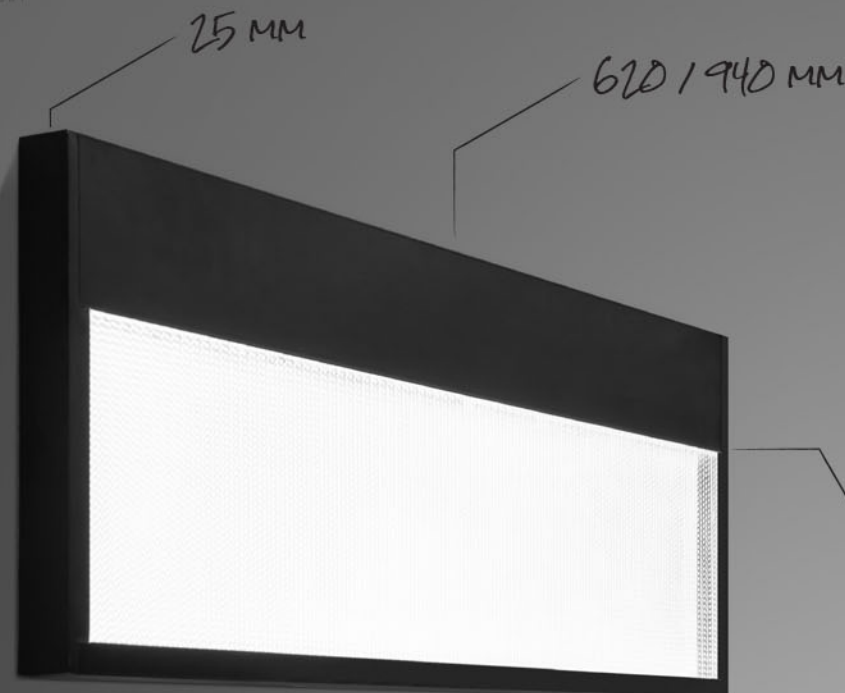


25 mm


620 / 940 mm

210 mm

TYPE OF INSTALLATION:

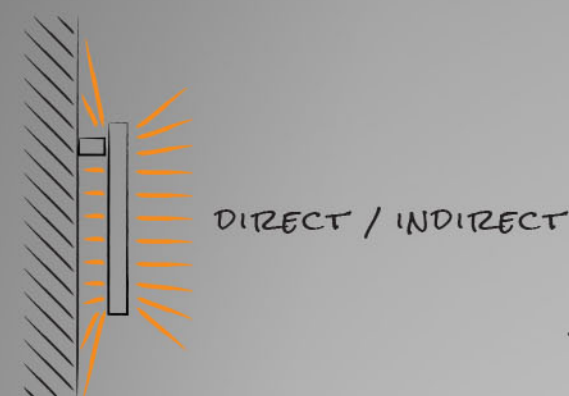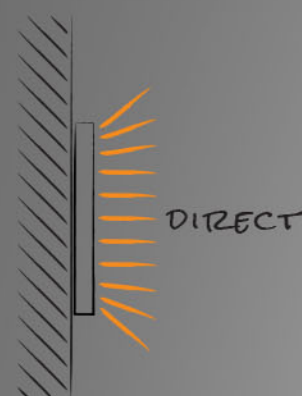

TRANSPARENT LGP PANEL

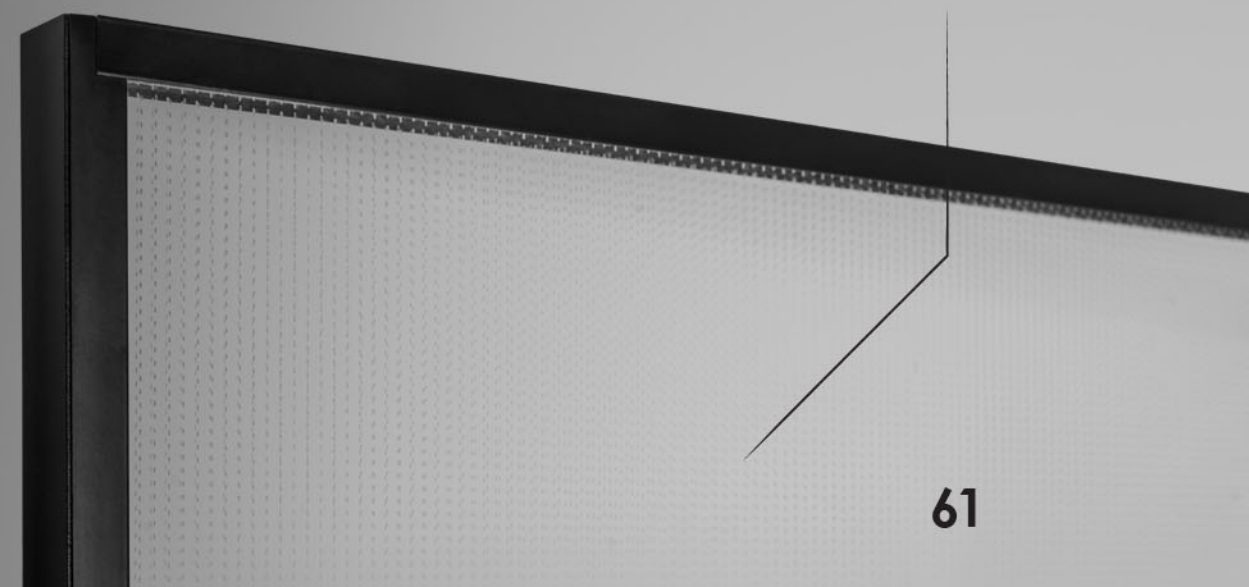

61

SCOUT wall

SCOUT spot

OUTDOOR



25 x 110 mm
HEIGHT 610 / 930 mm

- W** 3/13
- >100 lm/W
- CRI >80
- IP 66
- IK 08
- BUILT-IN DRIVER
- 20°C +40°C

esse-ci
LIVING LIGHT




SCOUT spot

Ø 35 mm




SCOUT wall spot






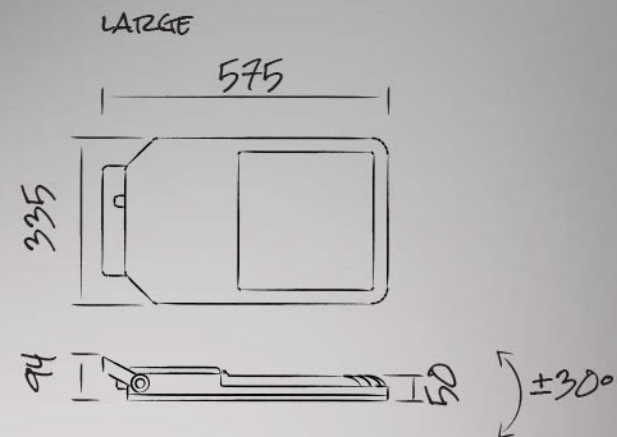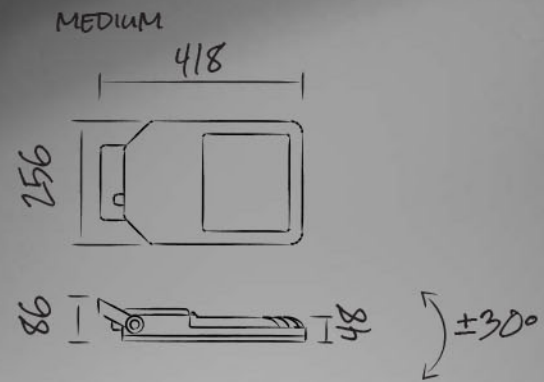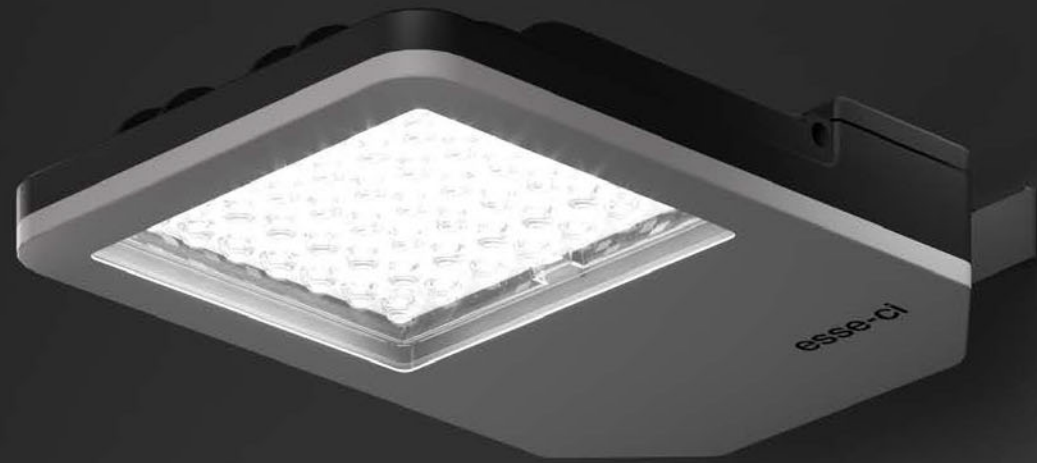

- W** 100 / 300
- >125 lm/W
- CRI >80
- IP 66
- IK 08
- 10 kW
- 30°C +45°C

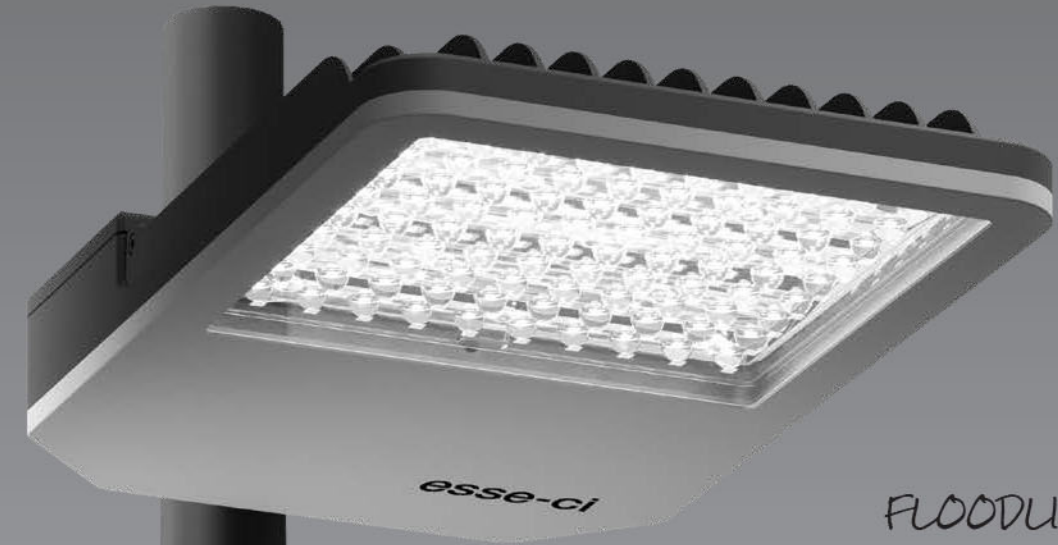

FLOODLIGHT

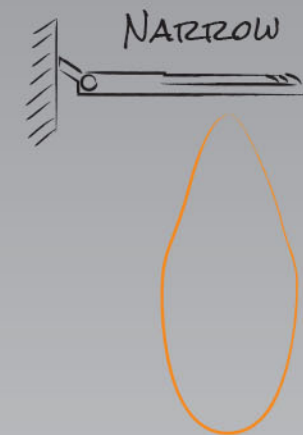





In
Light
We
Trust



esse-ci
LIVING LIGHT